

Please type a plus sign (+) inside this box → ☐

PTO/SB/05 (1/98)  
Approved for use through 09/30/2000. OMB 0651-0032  
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE  
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

<b>UTILITY PATENT APPLICATION TRANSMITTAL</b> (Only for new nonprovisional applications under 37 CFR 1.53(b))	Attorney Docket No.	3530.2US (97-1257.2)
	First Inventor or Application Identifier	Terry L. Gilton
	Title	SEPARATION APPARATUS INCLUDING POROUS SILICON COLUMN
	Express Mail Label No.	EL312576867US

<b>APPLICATION ELEMENTS</b> See MPEP chapter 600 concerning utility patent application contents.	<b>ADDRESS TO:</b> Assistant Commissioner for Patents Box Patent Application Washington, DC 20231
---	---

1. <input checked="" type="checkbox"/> * Fee Transmittal Form (e.g., PTO/SB/17) (Submit an original, and a duplicate for fee processing)	6. <input type="checkbox"/> Microfiche Computer Program (Appendix)
2. <input checked="" type="checkbox"/> Specification [Total Pages 27] (preferred arrangement set forth below) <ul style="list-style-type: none"><li>- Descriptive title of the invention</li><li>- Cross References to Related Applications</li><li>- Statement Regarding Fed sponsored R &amp; D</li><li>- Reference to Microfiche Appendix</li><li>- Background of the invention</li><li>- Brief Summary of the invention</li><li>- Brief Description of the Drawings (if filed)</li><li>- Detailed Description</li><li>- Claim(s)</li><li>- Abstract of the Disclosure</li></ul>	7. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary) <ul style="list-style-type: none"><li>a. <input type="checkbox"/> Computer Readable Copy</li><li>b. <input type="checkbox"/> Paper Copy (identical to computer copy)</li><li>c. <input type="checkbox"/> Statement verifying identity of above copies</li></ul>
3. <input checked="" type="checkbox"/> Drawing(s) (35 U.S.C. 113) [Total Sheets 6]	
4. Oath or Declaration [Total Pages 1] <ul style="list-style-type: none"><li>a. <input type="checkbox"/> Newly executed (original or copy)</li><li>b. <input checked="" type="checkbox"/> Copy from a prior application (37 C.F.R. § 1.63(d)) (for continuation/divisional with Box 17 completed) [Note Box 5 below]<ul style="list-style-type: none"><li>i. <input type="checkbox"/> DELETION OF INVENTOR(S) Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).</li></ul></li></ul>	
5. <input checked="" type="checkbox"/> Incorporation By Reference (useable if Box 4b is checked) The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered to be part of the disclosure of the accompanying application and is hereby incorporated by reference therein.	

#### ACCOMPANYING APPLICATION PARTS

- |  |
|--|
| 8. <input type="checkbox"/> Assignment Papers (cover sheet & document(s))  |
| 9. <input type="checkbox"/> 37 C.F.R. §3.73(b) Statement (when there is an assignee) <input type="checkbox"/> Power of Attorney  |
| 10. <input type="checkbox"/> English Translation Document (if applicable)  |
| 11. <input checked="" type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 <input type="checkbox"/> Copies of IDS Citations                               |
| 12. <input type="checkbox"/> Preliminary Amendment   |
| 13. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503)<br>(Should be specifically itemized)  |
| 14. <input type="checkbox"/> * Small Entity Statement(s) <input type="checkbox"/> Statement filed in prior application, Status still proper and desired (PTO/SB/09-12) |
| 15. <input type="checkbox"/> Certified Copy of Priority Document(s) (if foreign priority is claimed)   |
| 16. <input type="checkbox"/> Other: .....  |

\* A new statement is required to be entitled to pay small entity fees, except where one has been filed in a prior application and is being relied upon.

17. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:

<input type="checkbox"/> Continuation	<input checked="" type="checkbox"/> Divisional	<input type="checkbox"/> Continuation-in-part (CIP)	of prior application No: 09 / 177,814
Prior application information: Examiner G. Gabel			Group / Art Unit: 1641

#### 18. CORRESPONDENCE ADDRESS

<input type="checkbox"/> Customer Number or Bar Code Label	(Insert Customer No. or Attach bar code label here)	or <input checked="" type="checkbox"/> Correspondence address below	
Name	Joseph A. Walkowski Trask, Britt & Rossa		
Address	P.O. Box 2550		
City	Salt Lake City	State	Utah
Zip Code	84110		
Country	U.S.A.	Telephone	(801) 532-1922
		Fax	(801) 531-9168

Name (Print/Type)	Brick G. Power	Registration No. (Attorney/Agent)	38,581
Signature	<i>Brick G. Power</i>	Date	11/18/1999

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

PATENT  
Attorney Docket 3530.2US (97-1257.2)

NOTICE OF EXPRESS MAILING

Express Mail Mailing Label Number: EL312576867US

Date of Deposit with USPS: November 18, 1999

Person making Deposit: Jared S. Turner

APPLICATION FOR LETTERS PATENT

for

**SEPARATION APPARATUS INCLUDING POROUS SILICON COLUMN**

Inventor:  
Terry L. Gilton

Attorney:  
Brick G. Power  
Registration No. 38,581  
TRASK, BRITT & ROSSA  
P.O. Box 2550  
Salt Lake City, Utah 84110  
(801) 532-1922

# SEPARATION APPARATUS INCLUDING POROUS SILICON COLUMN

## BACKGROUND OF THE INVENTION

5        Cross Reference to Related Application: This application is a divisional of application Serial No. 09/177,814, filed October 23, 1998.

Field of the Invention: The present invention relates to chromatographs and other apparatus for separating the constituents of a sample. Particularly, the present invention relates to a miniaturized separation apparatus which comprises a porous capillary column.  
10       More specifically, the porous separation apparatus of the present invention includes a sample column and a detector that is disposed along the column to detect the presence of and identify each constituent that passes by the detector. The porous capillary column may comprise a matrix of porous silicon or hemispherical grain silicon on the surface thereof. The present invention also includes methods for manufacturing and using the  
15       inventive separation apparatus.

Background of Related Art: Various techniques have long been employed to separate the constituents of a sample in order to facilitate the identification and quantification of one or more of the constituents. Separation techniques are useful for separating inorganic substances and organic substances, such as chemicals, proteins, and  
20       nucleic acids. Techniques that have been conventionally employed for separating the constituents of a sample include various types of chromatography and electrophoresis.

      Chromatography is a process that is employed in analytical chemistry in order to separate and identify the constituents of a sample. The various types of chromatography that have been conventionally employed include thin layer chromatography (TLC),  
25       column chromatography, gel permeation chromatography, ion-exchange chromatography, affinity chromatography, high performance liquid chromatography (HPLC), and gas chromatography (GC).

      Thin film chromatography is a well known technique wherein a drop of a sample liquid is applied as a spot to a sheet of absorbent material, which may be paper or a sheet  
30       of plastic or glass covered with a thin layer of inert absorbent material, such as cellulose

or silica gel. Thin layer chromatographic techniques typically employ a solvent mixture, such as water and an alcohol as respective stationary and mobile phases. The solvent mixture permeates the absorbent material from one edge and the capillary action of the absorbent material moves the sample across the thin layer. One of the solvents binds more tightly to the absorbent material to act as a stationary phase, while the other acts as a mobile phase. As the solvent mixture moves across the absorbent material, the constituents of the sample are separated relative to their solubility in each of the two solvents. Stated another way, the sample constituents equilibrate according to their relative solubilities in each of the solvents. Constituents which are the most soluble in the stationary phase move very little, while constituents which are more soluble in the mobile phase move at higher rates and therefore travel greater distances across the absorbent material.

Conventional column chromatography techniques employ a vertical tube, or column, that is filled with a finely divided solid, or a liquid stationary phase. As a sample is washed down through the stationary phase, it is dissolved in and carried by a mobile phase, which is typically liquid or gas. The various constituents of the sample travel through the stationary phase at different rates. Thus, each of the constituents of the sample spend a different amount of time in the column. The constituents may be collected in fractions as they exit the column and subsequently identified or otherwise analyzed. Constituents of the sample which remain in the stationary phase may be separately identified or otherwise analyzed by sectioning the stationary phase.

Gel permeation chromatography techniques typically employ a column with a stationary phase disposed therein. The stationary phase includes an absorbent gel material with pores of substantially uniform size. As the mobile phase and the sample that is dissolved therein pass through the stationary phase, some of the molecules that are smaller than the pores become entrapped therein, and therefore pass through the column more slowly. The passage of intermediately sized molecules, which are of approximately the same size as the pores, through the column is delayed some, as such molecules enter some of the pores. Molecules that are larger than the pores of the absorbent gel material

pass through the stationary phase most quickly, as none of the larger molecules become entrapped in the pores.

Ion exchange chromatography is another variation of column chromatography, wherein the stationary phase comprises positively or negatively charged particles.

5 Oppositely charged constituents of a sample are attracted to the stationary phase, and therefore pass through the column at a slower rate than uncharged constituents and constituents which have the same charge as the charged particles of the stationary phase.

10 In affinity chromatography, the solid phase comprises particles which have substrate molecules or particles, such as purified antibodies or purified antigens, covalently attached thereto. The substrate binds to a specific constituent or group of constituents in a sample. For example, if the stationary phase comprises antibodies that are specific for a particular antigen, as the sample and mobile phase pass through the column, only that particular antigen will be bound by the stationary phase. The remainder of the sample constituents will pass through the column quickly. The column is  
15 subsequently washed to remove any residual amount of the sample from the column. The column is then washed with a dissociating solution, such as a concentrated salt solution, an acidic solution, or a basic solution, in order to dissociate the separated sample constituent from the stationary phase.

20 High performance liquid chromatography ("HPLC") is similar to column chromatography. In HPLC, the stationary phase is typically a liquid that is carried on very small particles, for example 0.01 mm or less. Consequently, the stationary phase has a very large surface area, and the mobile phase flows extremely slowly therethrough. Thus, a high pressure pump is typically employed in order to increase the rate at which the mobile phase moves through the column.

25 Conventional gas chromatography methods typically employ a liquid solid phase that is supported by a solid column and a mobile phase that comprises a substantially inert gas, such as nitrogen, argon, hydrogen, or helium. The sample is vaporized as it is injected into the column. As with thin layer chromatography, column chromatography, and HPLC, the constituents of the sample travel across the stationary phase at different

rates, and therefore exit the column at different times. As the constituents of the sample exit the column, the constituents are analyzed by a detector, such as a katharometer, a flame ionizer, or an electron capture system, which generates a chromatogram. The identity of each constituent may then be determined by analyzing the chromatogram.

5 Gas chromatographs are ever-decreasing in size in order to increase their portability. Some small, or miniature or micro gas chromatographs, include columns, which are also referred to as capillary columns, that are fabricated on a silicon substrate. United States Patents 5,583,281 (the “‘281 patent”), which issued to Conrad M. Yu on December 10, 1996; 4,935,040 (the “‘040 patent”), which issued to Michel G. Goedert on  
10 June 19, 1990; and 4,471,647 (the “‘647 patent”), which issued to John H. Jerman et al. on September 18, 1994, each disclose exemplary small silicon gas chromatography columns. The capillary columns that are disclosed in each of the ‘281, ‘040, and ‘647 patents include open channels, or conduits, that are etched into the semiconductor substrate.

15 Similarly, United States Patent 5,132,012 (the “‘012 patent”), which issued to Junkichi Miura et al. on July 21, 1992, discloses a liquid chromatograph that includes a capillary column formed in a semiconductor substrate. The capillary column of the chromatograph of the ‘012 patent comprises an open channel, or conduit.

20 United States Patent 5,571,410 (the “‘410 patent”), which issued to Sally A. Swedberg et al. on November 5, 1996, discloses a miniature gas chromatography system which includes a capillary column that is formed in a non-silicon substrate by laser ablation. The capillary column of the chromatograph of the ‘410 patent comprises an open channel, or conduit, with a substantially smooth surface.

25 The use of substantially smooth, open-channeled capillary columns in miniature chromatographs is, however, somewhat undesirable from the standpoint that open-channeled columns typically have a surface area that is limited by the area of the substantially smooth surface of the channel. The amount of stationary phase material that may be disposed along a given length of substantially smooth, open-channeled capillary columns is also limited by the surface area of that length of the capillary column. Thus,

in order to effectively separate the various constituents of a sample, the capillary column must be relatively long. Consequently, the substrate on which the capillary column is formed must have a sufficient surface area to facilitate fabricating the capillary column thereon. Thus, the use of substantially smooth, open-channeled capillary columns in miniature gas chromatographs imposes minimum size limitations on such chromatographs.

Another technique for separating the various constituents of a sample is typically referred to as electrophoresis. Electrophoresis is a process whereby molecules having a net overall electrical charge are migrated at a rate that depends on the electrical charge, size and shape of the molecule. Electrophoresis techniques typically employ a solid matrix through which the constituents, or molecules, of the sample are migrated. A variation of electrophoresis that is typically referred to as polyacrylamide gel electrophoresis (PAGE) separates molecules based strictly on their size. In PAGE, the molecules of the sample are typically linearized and separated, or disassociated from themselves and from other molecules, by means of sodium dodecyl sulfate (SDS), a detergent that binds to the hydrophobic regions of proteins, and 2-mercaptoethanol, or  $\beta$ -mercaptoethanol, which breaks disulfide (S—S) linkages that occur between some amino acids of a protein. The sample is then migrated through a polyacrylamide gel cross-linked matrix, which has very small pores. The pore size of the polyacrylamide gel may be adjusted in accordance with the molecular size, or weight, range for which separation is desired.

The preparation of polyacrylamide gels is a relatively long process. Moreover, the acrylamide that is used to form the gel matrix is a neurotoxin. Some of the other chemicals that may be utilized in electrophoretic processes are also hazardous. In addition, the amount of electric current that may be used to separate the constituents of a sample in gel electrophoresis has conventionally been limited, as too great a current will melt or otherwise disrupt the structure of the gel.

Thus, a small separation apparatus is needed that may be employed to conduct various types of sample separation, which is smaller than conventional devices, and

which separates samples adequately. There are also needs for reduced equipment and operational costs.

## SUMMARY OF THE INVENTION

5           The separation apparatus, method of manufacturing the separation apparatus, and methods of using the separation apparatus of the present invention address each of the foregoing needs.

10           The sample separation apparatus of the present invention includes a substrate with a capillary column thereon, the latter comprising a rough surface, such as a matrix which defines a plurality of pores therethrough or an open column with a rough surface, which is also referred to as a matrix. The surface area of the matrix of each capillary column facilitates the separation of the constituents of a sample over a relatively short length of the column compared to the required lengths of conventional smooth, "open", etched or ablated columns to effectively separate the constituents. Preferably, the capillary column, 15 which is also referred to as a porous capillary column, comprises porous silicon or hemispherical grain silicon, and is formed on a silicon substrate. Such a column, depending on the width and depth thereof, may be useful for separating the constituents of a sample or detecting constituents in a sample having a volume of as small as about one femtoliter ( $1 \times 10^{-15}$  liter). The separation apparatus may also include a detector 20 disposed proximate the capillary column. Such a detector analyzes a characteristic of a constituent as the constituent passes through the capillary column, and thereby identifies or otherwise analyzes the constituent.

25           In a first variation of the apparatus of the present invention, the sample separation apparatus may be employed as a chromatography column. Accordingly, a stationary, or solid, phase is disposed on the matrix of the capillary column. The type of stationary phase that is selected for use in the sample separation apparatus is dependent upon several factors, including without limitation the chromatographic technique that will be employed with the separation apparatus and the type of sample constituents that are to be isolated.



The types of stationary phase materials that are useful in conventional chromatographic processes are also useful in the first variation of the separation apparatus.

A second variation of the separation apparatus of the present invention is useful for conducting electrophoretic separation. Thus, size of the pores that are defined through the porous silicon matrix or the amount of space between grains of hemispherical grain silicon of the capillary column is determined by the desirable rate of separation and the size of the sample constituents for which separation is desired. The second variation of the separation apparatus also includes first and second electrodes positioned proximate respective first and second ends of the capillary column. The first and second electrodes are connectable to opposite electrical charges so as to facilitate the generation of a current along a length of the capillary column, and thereby facilitate the movement and separation of the sample constituents along the column. Preferably, the second variation of the separation apparatus also includes a control column adjacent the capillary column and having substantially the same dimensions, structure, and pore sizes or spacing as the capillary column. The control column is useful for determining the molecular size or weight of at least some of the various sample constituents.

In a third variation of the apparatus, the sample separation apparatus may be employed to detect the presence or absence of increased levels of a certain analyte. Accordingly, the third variation includes a capture substrate disposed on at least a portion of the rough surfaces of the capillary column. Preferably, the capture substrate has a specific affinity for the measured, or assayed, analyte.

A method of fabricating the sample separation apparatus of the present invention includes selectively forming a capillary column in a substrate.

When a silicon substrate is employed, various techniques which are known in the art may be employed to define a porous silicon capillary column therein. Known techniques may also be used in order to form pores of a desired size. Known semiconductor layer formation processes may also be employed to fabricate a detector proximate the capillary column. Similarly, known processes are useful for fabricating electrodes and other structures upon a surface of the substrate.

Capillary columns that include hemispherical grain silicon may also be selectively formed in a substrate by known techniques. First, a trench, which defines the path of the capillary column, is defined in a substrate by known patterning processes, such as mask and etch techniques. The surface area of the surfaces of the trench may then be increased by known methods, such as by forming hemispherical grain silicon thereon.

A method of utilizing the inventive separation apparatus includes disposing a sample proximate an end of the porous capillary column and drawing the sample through the porous capillary column to generate a flowfront of the sample and effect the separation of a constituent from the sample. The sample may be drawn along the capillary column by positive pressure, negative pressure, capillary action, electric current, or any other known technique that is employed to facilitate the movement of a sample along a separation apparatus.

Variations of the inventive method employ the separation apparatus of the present invention to effect various separation techniques, including, without limitation, various types of chromatographic separation, electrophoresis, and the isolation and detection of one or more analytes from a sample.

Other advantages of the present invention will become apparent to those of ordinary skill in the relevant art through a consideration of the appended drawings and the ensuing description.

#### BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS

FIG. 1 is a perspective view of an embodiment of a sample separation apparatus of the present invention;

FIG. 1a is a cross-section taken along line 1a—1a of FIG. 1, which also illustrates a sealing element disposed over at least a portion of the sample separation apparatus;

FIG. 1b is a perspective view of a variation of the sample separation apparatus of FIG. 1, which illustrates an alternative placement of detectors;

FIG. 2 is a perspective view of a variation of the sample separation apparatus of FIG. 1 that is useful for performing chromatography;

FIG. 2a is a perspective view of a variation of the sample separation apparatus of FIG. 2 including a vacuum source operatively connected to the capillary column;

FIG. 3 is a perspective view of another variation of the sample separation apparatus of FIG. 1 that is useful for performing electrophoresis;

5           FIG. 3a is a schematic representation of the sample separation apparatus of FIG. 3, illustrating use of the sample separation apparatus in association with an electrophoresis apparatus;

FIG. 4 is a perspective view of another variation of the sample separation apparatus of FIG. 1 that is useful for isolating and detecting an analyte;

10           FIG. 5 is a cross-sectional view of a substrate that has been patterned to define capillary column regions thereon;

FIG. 6 is an enlarged cross-sectional view taken along line 6—6 of FIG. 1 and illustrating the capillary columns;

15           FIG. 7 is a schematic representation of the use of an anodization chamber to porify the capillary column regions of the substrate of FIG. 5; and

FIG. 8 is an enlarged cross-sectional view of an alternative rough capillary column, which includes hemispherical grain silicon on the surface thereof.

#### DETAILED DESCRIPTION OF THE INVENTION

20           With reference to FIG. 1, a first embodiment of a sample separation apparatus 10 of the present invention is depicted. Sample separation apparatus 10 includes a substrate 12 and capillary columns 14 formed in the substrate. Capillary columns 14 each include a matrix 16 and a plurality of pores 18 formed through the matrix. Pores 18 permit gases and liquids to flow along the distance of capillary columns 14. Capillary columns 14 may  
25           also include one or more reaction regions 20 along the longitudinal extent thereof. Preferably, each of the reaction regions 20 along each capillary column 14 are discrete from one another. Sample separation apparatus 10 may also include one or more detectors 22 disposed proximate each capillary column 14.

Substrate 12 may be formed of silicon, gallium arsenide, indium phosphide, or another material that can be treated to form porous regions, such as capillary columns 14, and upon which electrical devices, such as detector 22, can be formed. Accordingly, capillary columns 14 may each comprise porous silicon.

5 Alternatively, capillary columns 14 may be etched into a surface of substrate 12, and the surfaces of capillary columns 14 roughened. An exemplary means of roughening the surfaces of capillary columns 14 includes forming hemispherical grain silicon thereon.

FIG. 1 illustrates a sample separation apparatus 10 that includes four capillary columns 14. The length and porosity of each column 14 depends, in part, upon the surface tension and viscosity of the sample to be measured, and the desired degree of separation. As depicted, each capillary column 14 includes three reaction regions 20. Preferably, variations of sample separation apparatus 10 with more than one capillary column 14 include an equal number of reaction regions 20 along each capillary column. Moreover, in variations of sample separation apparatus 10 wherein the capillary columns 14 each include more than one reaction region 20, the positioning and spacing between corresponding reaction regions are preferably substantially the same along each of the capillary columns. Preferably, corresponding reaction regions 20 on different columns 14 have substantially the same dimensions and pores 18, or spacing between adjacent grains of hemispherical grain silicon, which spaces are also referred to as “pores,” of substantially the same sizes and porosity.

Pores 18 may have cross-sectional diameters ranging from about one nanometer (1 nm) or less to about 100 nm or greater. Due to the small size of pores 18, the surface tension of many liquid samples will cause such samples to travel very slowly along the distance of capillary column 14 and create a flowfront. Gaseous samples typically do not exhibit capillary action; thus, some amount of force is required to facilitate the movement of gaseous samples along capillary column 14. Accordingly, a migration facilitator 24, such as a pump, vacuum, or current-generating device, which is also referred to as a flow facilitator, may be disposed proximate capillary column 14 in order to facilitate or increase the migration rate of a sample 70 therealong.

Detectors 22 may be disposed adjacent capillary column 14 in order to identify or otherwise analyze a constituent of sample 70 as the constituent passes thereby. Various embodiments of detector 22 include, but are not limited to, thermistors, field effect transistors (FETs) that are capable of sensing various types of chemicals, components that measure current as a voltage is applied to sample 70, and other devices that are known to measure at least one characteristic of a constituent of sample 70 or otherwise facilitate identification of the constituent. United States Patent 5,132,012 (the “‘012 patent”), which issued to Junkichi Miura et al. on July 21, 1992, the disclosure of which is hereby incorporated by reference in its entirety, discloses an exemplary field effect transistor that may be employed as a detector 22 in the present invention. United States Patent 4,471,647 (the “‘647 patent”), which issued to John H. Jerman et al. on September 18, 1984, the disclosure of which is hereby incorporated by reference in its entirety, discloses an exemplary thermal detector that may be employed as a detector 22 in the sample separation apparatus of the invention. Detector 22 may be positioned proximate an exit end 14b, which is also referred to as a second end, of capillary column 14 to analyze the various constituents of sample 70 as they pass thereby. Alternatively, as shown in FIG. 1b, detector 22 may be positioned proximate a reaction region 20 of capillary column 14. More than one detector 22 may be disposed proximate each capillary column 14 to analyze sample 70 and the constituents thereof at various positions of the capillary column.

Separation apparatus 10 may also include a processor 80 and a memory device 82, each of a type known in the art. Processor 80 receives information about sample 70, or “sample information”, from one or more types of detectors 22 along column 14 and processes the sample information to output same in a user-friendly format to a display 84 external of sample separation apparatus 10. In processing the sample information, processor 80 may compare the sample information to known information that has been stored in memory device 82, and thereby identify the sample or generate other data regarding the sample information. The sample identity may then be transmitted to display 84. Following the comparison of sample information to known information, processor 80

may direct memory device 82 to store information about the sample, including its identity and associated data.

With reference to FIG. 1a, separation apparatus 10 may also include a sealing element 11 disposed over a substantial portion of the area of each capillary column 14 that is exposed on substrate 12. Sealing element 11 is preferably electrically insulative and may be manufactured from silicon dioxide, glass (e.g., borosilicate glass (BSG), phosphosilicate glass (PSG), borophosphosilicate glass (BPSG), etc.), silicon nitride, polyimide, other electrically non-conductive polymers, or any other electrically insulative material.

Turning now to FIG. 2, a second embodiment of the sample separation apparatus 10' of the present invention is shown, which comprises a chromatography column. Accordingly, a stationary phase 17 may be disposed on matrix 16' of each capillary column 14'. Stationary phase 17 comprises a material that is selected on the basis of several factors, including without limitation the chromatographic technique that will be employed and type of sample constituents for which separation or isolation is desired. Conventionally employed stationary phase materials may also be employed as stationary phase 17.

Separation apparatus 10' may also include a migration facilitator 24' which comprises a pump 26' that applies positive pressure to facilitate the migration of a sample along each capillary column 14'. Exemplary pumps 26' that are useful in separation apparatus 10' are disclosed in United States Patent 5,663,488 (the "488 patent"), which issued to Tak Kui Wang et al. on September 2, 1997, the disclosure of which is hereby incorporated by reference in its entirety. Preferably, pump 26' is positioned proximate a sample application end 14a', or first end, of each capillary column 14', and is in flow communication with the capillary column and to facilitate movement of a sample 70' along each column 14'. A valve 25' may be disposed between pump 26' and each column 14' in order to control the volume of gas or liquid that is forced into the column by the pump in order to apply pressure to the column. Exemplary valves 25' that are useful in the separation apparatus of the present invention include the valves that are

disclosed in United States Patents 4,869,282 (the “282 patent”), which issued to Fred C. Sittler et al. on September 26, 1989, and 5,583,281 (the “281 patent”), which issued to Conrad M. Yu on December 10, 1996, the disclosures of each of which are hereby incorporated by reference in their entirety.

5           Alternatively, as depicted in FIG. 2a, migration facilitator 24' may comprise a vacuum source 28', as known in the art, which exerts a negative pressure on sample 70 in order to pull the sample along each capillary column 14'. Such a vacuum source is operatively attached to capillary column 14', and in flow communication therewith, proximate an exit end 14b', or second end, thereof. Preferably, the amount of negative  
10           pressure that is generated by vacuum source 28' and applied to each capillary column 14' may be adjusted or varied.

FIG. 3 illustrates a third embodiment of the sample separation apparatus 10" of the present invention, which is particularly useful for conducting electrophoretic separation on a sample 70". The degree to which the constituents of sample 70 are  
15           separated depends upon the cross-sectional diameter of pores 18". Accordingly, the greatest degree of separation occurs when the size of pores 18" is approximately equivalent to the size of the various constituents of sample 70" for which separation is desired, or the “targeted” constituents. Thus, pores 18" of small cross-sectional diameters separate the smaller constituents of sample 70". Pores 18" of larger cross-  
20           sectional diameters permit the migration and separation of the larger sized constituents through each capillary column 14". Thus, the cross-sectional diameter of pores 18" preferably facilitates separation of the various targeted constituents of sample 70".

Electrophoretic techniques typically employ an electric current to move the constituents of sample 70". Thus, sample separation apparatus 10" may include a  
25           migration facilitator 24" which comprises an electric current-generating component 30. Current-generating component 30 includes a first electrode 32 disposed proximate a sample application end 14a", which is also referred to as a first end, of each capillary column 14", and a second electrode 34 that is positioned proximate exit end 14b" of each capillary column 14". First and second electrodes 32 and 34, respectively, are fabricated

from an electrically conductive material, and are connectable to opposite electrical charges so as to facilitate the generation of a current along a length of the capillary column. Thus, first and second electrodes 32 and 34, respectively, facilitate the migration of the constituents of sample 70" along their respective capillary columns 14" and the separation of the constituents during migration.

Alternatively, with reference to FIG. 3a, a sample separation apparatus 10" which lacks a current-generating component may be utilized in association with a conventional electrophoresis apparatus 60 that includes a chamber 62 with a cathode 64 extending into one end thereof and an anode 65 extending into an opposite end of the chamber.

Referring again to FIG. 3, separation apparatus 10" also includes a control column 36" adjacent at least one of capillary columns 14", which has substantially the same dimensions and a matrix 38" and pores 40" having substantially the same configurations and sizes as the matrix 16" and pores 18" of each capillary column 14". Control column 36" is useful for separating a control which includes markers 42a, 42b, 42c, etc. of known molecular size and weight. Thus, as is known in the art, at least some of the various constituents of the sample may be compared to markers 42a, 42b, 42c, etc. in order to approximate the molecular size or weight of these constituents.

Referring now to FIG. 4, a fourth embodiment of the sample separation apparatus 100 of the present invention is illustrated. Separation apparatus 100 includes a stationary phase, which is referred to as capture substrate 117, which detects the presence and approximate levels of a particular analyte or group of analytes in the sample. Capture substrate 117 may include an antibody, an antigen, or any other substrate material which separates a constituent from a sample on the basis of affinity for the constituent. Accordingly, sample separation apparatus 100 comprises an assay device. Preferably, capture substrate 117 has a specific affinity for the detected analyte or group of analytes. Capture substrate 117 is disposed along a portion of each capillary column 114 and securely bound to matrix 116 so as to retain substantially all of the capture substrate on the matrix as a sample passes thereby. Capture substrate 117 is preferably bound to matrix 116 at reaction region 120. Accordingly, detector 122 is preferably positioned



proximate reaction region 120 in order to detect whether or not capture substrate 117 has bound an analyte.

Referring again to FIG. 1, capillary columns 14 may be formed upon substrate 12 by processes that are known in the art, including processes for forming porous silicon from silicon. FIGs. 5 through 7 illustrate an exemplary process for fabricating sample separation apparatus 10. With reference to FIG. 5, substrate 12 is appropriately patterned to define the desired number and shapes of capillary column regions 40. As shown in FIG. 6, pores 18 are then created in the defined capillary column regions 40, which is also referred to as "porifying" of the capillary column regions, by techniques that are known in the art, such as anodization in the presence of hydrofluoric acid (HF).

Referring again to FIG. 5, patterning may include masking and etching techniques that are known in the art, such as those in which photoresists are employed. A photoresist 44 is disposed over the surface of substrate 12 and defined by photolithography processes, as known in the art, to define a mask 46 with openings 48 therethrough. Openings 48 expose various areas of substrate 12, which are referred to as capillary column regions 40.

Patterning may also include the doping of substrate 12 with dopants and by techniques that are known in the art in order to provide the desired amount of porosity and porous silicon of a desired morphology. As those in the art are aware, the ability to form pores in silicon by anodization processes, as well as the size and density of such pores and the rate at which pores are formed, depend upon the presence or absence of dopant and the type and concentration of dopant. For example, small pores may be formed in P-doped silicon. Larger pores are more readily formed in P+doped silicon. N+doped silicon typically resists the formation of pores by anodization. Accordingly, patterning may also include repeated masking and differential doping of substrate 12 in order to facilitate the subsequent selective creation of a porous matrix through the substrate. Such doping processes are disclosed in United States Patent 4,532,700 (the "700 patent"), which issued to Wayne I. Kinney et al. on August 6, 1985, and United States Patent 5,360,759 (the "759 patent"), which issued to Reinhard Stengl et al. on

November 1, 1994, the disclosures of both of which are hereby incorporated by reference in their entirety.

Alternatively, patterning may include a mask and etch, as known in the art, followed by damaging, or “roughing”, the exposed areas of substrate 12 to define capillary column regions 40, as disclosed in United States Patent 5,421,958 (the “‘958 patent”), which issued to Robert W. Fathauer et al. on June 6, 1995, the disclosure of which is hereby incorporated by reference in its entirety. It is known in the art that porous silicon forms more readily on damaged, or roughened, areas on the surface of a silicon substrate 12. As the ‘958 patent discloses, the damaging of substrate 12, or the creation of imperfections on same, may include, without limitation, mechanically damaging substrate 12 and applying energetic beams to substrate 12.

FIG. 7 schematically illustrates an anodization chamber 50 in which an exemplary process for porifying capillary column regions 40 of substrate 12 (*see* FIG. 6) may occur. The porifying of capillary column regions 40 in order to define capillary columns 14 (*see* FIGs. 1 and 6) in substrate 12 may be performed by conventional processes, including processes for forming porous silicon regions in semiconductor devices. Exemplary process for forming porous silicon from a silicon substrate are disclosed in each of the ‘700, ‘759, and ‘958 patents. Such porification processes typically include positioning substrate 12 within an anodization chamber 50, adjacent a partition 52, which separates the anodization chamber into a first cell 54 and a second cell 55, which are also referred to as “sections”. An anode 56 extends into first cell 54. Similarly, a cathode 57 extends into second cell 55. Partition 52 includes an opening 53 therethrough, which is covered by substrate 12 and sealed to prevent the passage of liquids between first cell 54 and second cell 55. Thus, an upper surface 12a of substrate 12 is exposed to first cell 54, while an opposing base surface 12b is exposed to second cell 55. First cell 54 is filled with an anodizing solution 58, such as concentrated hydrofluoric acid, while second cell 55 is filled with an electrically conductive liquid 59, such as 50% isopropyl alcohol. By means of anode 56 and cathode 57, an electric current is then applied to anodization

chamber 50. As current passes through substrate 12, the areas of upper surface 12a that are exposed to first cell 54 become porous.

The size of pores 18 is determined by, and may be varied by, varying several factors, including, without limitation, the concentration of any doped regions of the substrate, the presence or absence of dopants, the type of dopants, the relative concentrations of the various elements of the anodizing solution, the duration of exposure to the anodizing solution, the current density, the illumination, and the temperature of the anodizing solution.

Other known processes for patterning capillary column regions 40 on substrate 12 and porifying same, such as that disclosed in United States Patent 5,599,759 (the “759 patent”), which issued to Shinji Inagaki et al. on February 4, 1997, the disclosure of which is hereby incorporated by reference in its entirety, are also useful for defining capillary columns 14 on substrate 12, and are therefore within the scope of the fabrication process of the present invention.

With reference to FIG. 8, as another alternative, capillary columns 214 that include hemispherical grain silicon 216 on the surfaces 215 thereof may be formed in selected regions of a substrate 212 by known techniques. First, an elongate trench 213, which defines the path of the capillary column, is defined in a substrate by known patterning processes, such as mask and etch techniques. The area of the surfaces of trench 213 may then be increased by known methods, such as by forming hemispherical grain silicon 215 thereon. Exemplary methods of forming hemispherical grain silicon that may be employed to fabricate capillary columns 214 include those disclosed in United States Patent 5,407,435, which issued to Randhir P.S. Thakur on April 18, 1995; United States Patent 5,623,243, which issued to Hirohito Watanabe et al. on April 22, 1997; United States Patent 5,634,974, which issued to Ronald A. Weimer et al. on June 3, 1997; United States Patent 5,721,171, which issued to Er-Xuan Ping et al. on February 24, 1998; and United States Patent 5,726,085, which issued to Darius Lammont Crenshaw et al. on March 10, 1998, the disclosures of each of which are hereby incorporated by reference in their entirety. In general, a film of amorphous silicon is

formed in trench 213. Impurities are then seeded into the amorphous silicon. Then, the material is annealed to cause nucleation sites to grow at the seeding sites to thereby form the rough textured hemispherical grain silicon 216. A solid phase 218, such as a native oxide layer, may then be grown on the surface of the hemispherical grain silicon 216.

5 Finally, the entire structure 210 may be enclosed by a cover layer 220 or a suitable package.

The hemispherical grain silicon 216 provides a rough texture on the interior surface of the capillary column 214. The surfaces 215 of capillary column 214 are characterized by hemispherical or mushroom-shaped bumps, which form a porous,  
10 matrix-like structure. The hemispherical grain silicon 216 provides at least about 1.6 to 2.2 times the surface area that would otherwise be provided by a conventional surface etched in silicon. Silicon oxide may be employed as solid phase 218. Silicon oxide is a suitable solid phase material for separating or detecting a wide variety of materials. Alternatively, materials with different absorption characteristics, such as suitable resins,  
15 metals, or metal oxides, may be employed as solid phase 218.

Referring again to FIGs. 1-1b, detector 22, processor 80, memory device 82, valves 25, cathode 32 (FIG. 3), anode 34 (FIG. 3) and other components that are carried upon substrate 12 may be fabricated upon the substrate in a desired location by known semiconductor fabrication processes. Such semiconductor fabrication processes include,  
20 without limitation, layer deposition processes (e.g., sputtering and chemical vapor deposition); oxidation processes; patterning processes (e.g., masking and etching); and other conventional semiconductor device fabrication processes.

A stationary phase (*see* FIGs. 1 through 4) may be applied to matrix 16 as known in the art.

25 With continued reference to FIG. 1, a method of utilizing the inventive sample separation apparatus 10 includes disposing a sample proximate first end 14a of at least one capillary column 14. A liquid sample 70 may then be drawn along the length of capillary columns 14 by capillary action or with the assistance of migration facilitator 24. A gaseous sample 70 may be drawn along the length of capillary column 14 by means of

migration facilitator 24. As sample 70 is drawn through pores 18 that are defined by matrix 16, one or more constituents of sample 70 is separated from the remainder of sample 70. The mechanism by which the separation of a constituent from sample 70 occurs depends upon the separation technique that is performed, as explained in greater detail below. The separated constituents may then be detected when they are in close proximity to, or proximate, a detector 22.

Referring again to FIGs. 2 and 2a, when sample separation apparatus 10' is employed in a chromatographic technique, one or more constituents of a sample 70' are separated in accordance with their relative solvencies in stationary phase 17, which is disposed on matrix 16', and a mobile phase, which carries the sample along the length of each capillary column 14'. When either gas chromatography or HPLC is performed, the use of a pump 26' (*see* FIG. 2) or a vacuum source 28' (*see* FIG. 2a) is preferred in order to facilitate the migration of the sample along each capillary column 14'. Pump 26' or vacuum source 28' may also be employed to facilitate sample migration along capillary columns 14' during the use of sample separation apparatus 10' to perform other chromatographic techniques.

Turning again to FIG. 3, in order to separate one or more constituents of a sample 70" by electrophoresis, the sample is first dissolved in a conventional carrier solvent, which typically includes a pH buffer solution of a desired pH, 2-mercaptoethanol, SDS, and glycerol. The SDS imparts the constituents of sample 70" with a negative net charge and facilitates the unraveling, or linearization, of the constituents. The 2-mercaptoethanol breaks covalent disulfide (S—S) bonds between some amino acids of some protein constituents.

With continued reference to FIG. 3, a first variation of the electrophoretic method of the present invention includes applying sample 70" to first end 14a" of at least one capillary column 14". Preferably, sample 70" is diluted in a pH-buffered solution, as known in the art. An electric current is then applied to current-generating component 30, in order to migrate sample 70" along capillary columns 14". Preferably, first electrode 32

acts as a cathode (i.e., electrons flow therefrom), while second electrode 34 acts as an anode (i.e., electrons flow thereto).

Alternatively, with reference to FIG. 3a, a second variation of the electrophoretic method according to the present invention is illustrated, wherein sample separation apparatus 10" may be disposed in an electrophoresis apparatus 60 of the type that is typically employed in gel electrophoretic techniques. Electrophoresis apparatus 60 includes a chamber 62 with a cathode 64 extending into one end thereof, and an anode 65 extending into the opposite end thereof. A buffer solution of any of the types that are typically employed in electrophoresis, and having a desired pH, is poured into chamber 62. Sample separation apparatus 10" is then positioned in electrophoresis apparatus 60, with first end 14a" of capillary columns 14" proximate cathode 64 and second end 14b" proximate anode 65. A sample 70" is applied to first end 14a", and an electric current of desired amperage is then applied to cathode 64 and anode 65 in order to migrate the sample along the length of at least one capillary column 14".

In both the first and second variations of the electrophoretic method of the present invention, as the sample migrates through pores 18, the constituents 72a", 72b", 72c", etc. of sample 70" may be separated on the basis of size or net electric charge. When separation of constituents 72" on the basis of size is desired, sample 70" preferably includes a substance, such as SDS, which imparts each of constituents 72" with the same net electrical charge. Various constituents of the sample may then be detected with a detector, by staining, spectrophotometrically, radiographically, or by other detection or identification techniques that are known in the art.

As an example of the use of sample separation apparatus 110, which is illustrated in FIG. 4, a constituent, or an "analyte" 172, of a sample 170 is isolated from the remainder of the sample. Sample 170 is applied to first end 114a of at least one capillary column 114. As sample 170 moves through column 114, each of the constituents of the sample, including analyte 172, contact capture substrate 117. If sample 170 includes any analytes 172 for which capture substrate 117 has an affinity, these analytes are bound by the capture substrate 117 and isolated from the remainder of the sample as the sample

contacts and passes by the capture substrate. The presence or absence of capture substrate 117-bound analytes 172 may then be detected by detector 122, by staining, spectrophotometrically, radiographically, or by other detection or identification techniques that are known in the art. The concentration or relative amounts of each isolated analyte 172 may also be determined in such a manner.

As another example of the use of sample separation apparatus 110, to detect the presence of silver, capillary column 114 may be provided with a free chloride source, such as calcium chloride or sodium chloride. When an aqueous solution containing silver is drawn into the capillary column 114, resultant precipitation of silver chloride would reduce the chloride concentration in capillary column 114. The resultant reduced ionic conductivity in capillary column 114 may be measured by detector 122 and compared to a conductivity profile stored in a memory element associated with sample separation apparatus 110. For the purpose of comparison, another capillary column 114' of sample separation apparatus 110 may be provided with no free chloride source. As the aqueous silver solution is drawn into the second capillary column 114', the ionic conductivity of the second capillary column 114' may be measured by another detector. The ionic conductivity profile of the second capillary column 114' may be compared to that of the first capillary column 114 and to the conductivity profile. The measured and stored data may then be processed to determine the concentration of silver in the original sample.

Although the foregoing description contains many specifics, these should not be construed as limiting the scope of the present invention, but merely as providing illustrations of some of the presently preferred embodiments. Similarly, other embodiments of the invention may be devised which do not depart from the spirit or scope of the present invention. The scope of this invention is, therefore, indicated and limited only by the appended claims and their legal equivalents, rather than by the foregoing description. All additions, deletions and modifications to the invention as disclosed herein which fall within the meaning and scope of the claims are to be embraced within their scope.

## CLAIMS

### What is claimed is:

1. A method of substantially isolating a constituent of a sample, comprising:  
dispersing the sample in a mobile phase;  
5 applying the sample to a first end of a capillary column comprising a matrix; and  
drawing the sample across a flowfront through said porous capillary column so as to  
enhance separation of the constituent therefrom.
2. The method of claim 1, further comprising detecting the constituent with  
10 at least one detector disposed proximate a detecting region of said capillary column.
3. The method of claim 1, further comprising applying a stationary phase to  
said matrix.
- 15 4. The method of claim 3, wherein said applying said stationary phase is  
effected before said applying the sample.
5. The method of claim 1, wherein said dispersing comprises vaporizing the  
sample in a gaseous mobile phase.  
20
6. The method of claim 5, wherein said gaseous mobile phase is a  
substantially inert gas.
7. The method of claim 6, wherein said substantially inert gas is nitrogen,  
25 hydrogen, helium or argon.
8. The method of claim 1, wherein said dispersing comprises dissolving the  
sample in a liquid mobile phase.



9. The method of claim 1, wherein said drawing separates the constituent from the sample on the basis of a size of the constituent.

5 10. The method of claim 1, wherein said drawing separates the constituent from the sample on the basis of an electrical charge of the constituent.

10 11. The method of claim 1, wherein said drawing separates the constituent from the sample on the basis of an affinity of the constituent for a capture substrate disposed on said matrix.

12. The method of claim 11, wherein said capture substrate is an antibody.

13. The method of claim 11, wherein said capture substrate is an antigen.

15 14. The method of claim 1, further comprising applying a differential pressure to said capillary column to effect said drawing.

16 15. The method of claim 1, wherein said drawing occurs without applying differential pressure to said capillary column.

20 16. The method of claim 15, wherein said drawing comprises capillary action induced by said matrix.

25 17. The method of claim 1, wherein said drawing comprises applying an electrical current across a length of said capillary column.

18. A method of identifying the presence of a constituent in a sample, comprising:  
providing the sample in a mobile phase;

applying the sample to a first end of a capillary column comprising a matrix;  
drawing the sample across a flowfront through said capillary column and in contact with a  
stationary phase disposed at a selected location along said capillary column; and  
detecting binding of the constituent with said stationary phase.

5

19. The method of claim 18, wherein said detecting comprises applying a  
detection reagent to at least said selected location and analyzing said detection reagent to  
determine whether the constituent is present.

10

20. The method of claim 19, wherein said analyze comprises quantifying a  
change in said detection reagent.

15

21. The method of claim 18, wherein said detecting comprises determining an  
electrical characteristic of said selected location and comparing said electrical  
characteristic to an electrical characteristic of a control.

20

22. The method of claim 18, further comprising applying a stationary phase to  
said matrix.

23. The method of claim 22, wherein said applying said stationary phase is  
effected before said applying the sample.

25

24. The method of claim 18, wherein said stationary phase comprises an  
antibody.

25. The method of claim 18, wherein said stationary phase comprises an  
antigen.

26. The method of claim 18, further comprising applying a differential pressure to said capillary column to effect said drawing.

5 27. The method of claim 18, wherein said drawing occurs without applying differential pressure to said capillary column.

28. The method of claim 27, wherein said drawing comprises capillary action induced by said matrix.




10 29. The method of claim 18, wherein said drawing comprises applying an electrical current across a length of said capillary column.

0  
1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2186  
2187  
2188  
2189  
2190  
2191  
2192  
2193  
2194  
2195  
2196  
2197  
2198  
2199  
2200  
2201  
2202  
2203  
2204  
2205

## ABSTRACT OF THE DISCLOSURE

A sample separation apparatus including a porous, or rough, capillary column. The porous capillary column includes a matrix which defines pores, and may be formed from a material such as porous silicon. Alternatively, the capillary column may have a rough surface of hemispherical grain silicon. The capillary column is defined in a surface of a substrate, such as silicon. The sample separation apparatus may include a stationary phase or a capture substrate disposed on the surfaces thereof. The sample separation apparatus may also include a detector positioned proximate the capillary column. A variation of the sample separation apparatus includes an electrode proximate each end of the capillary column. The sample separation apparatus may be employed to effect various types of chromatographic separation, electrophoretic separation, and analyte identification.

15 384.wpd 11/18/99

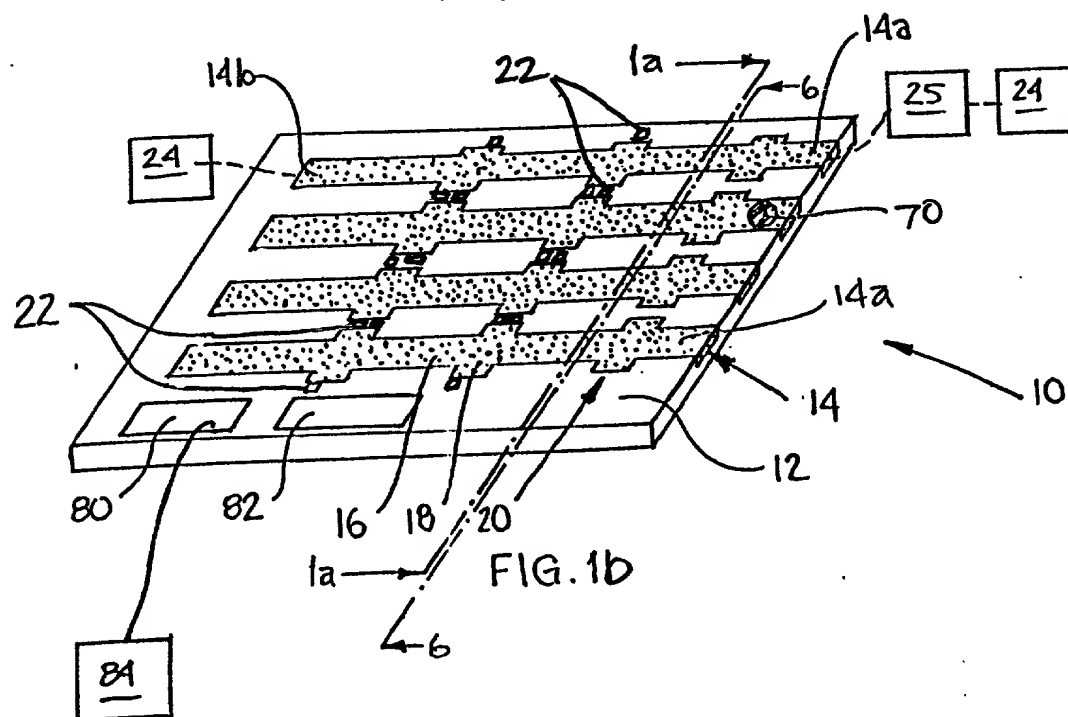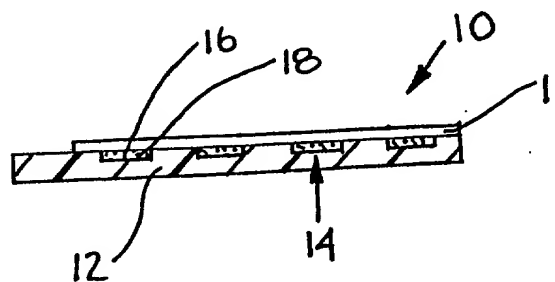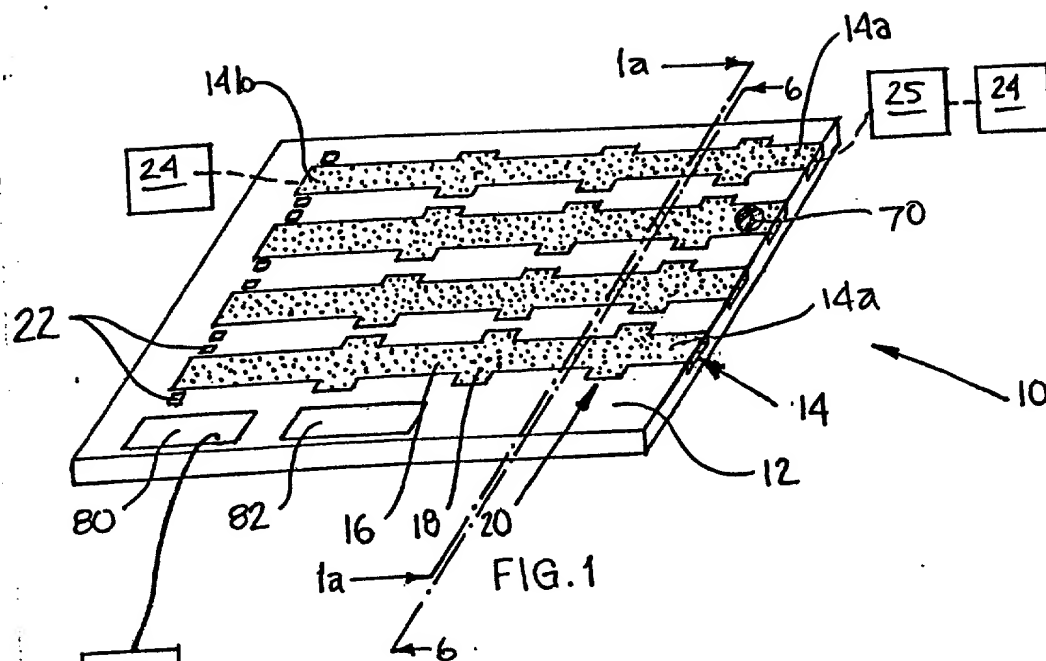

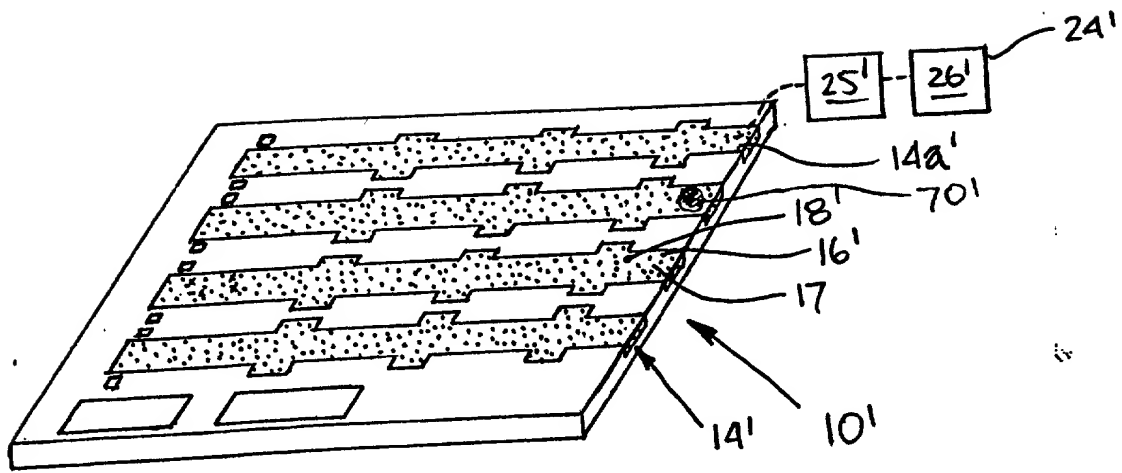


FIG. 2

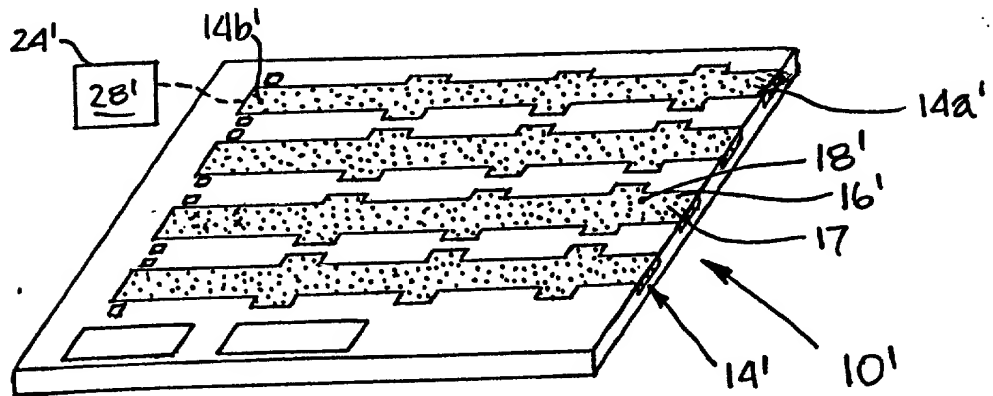
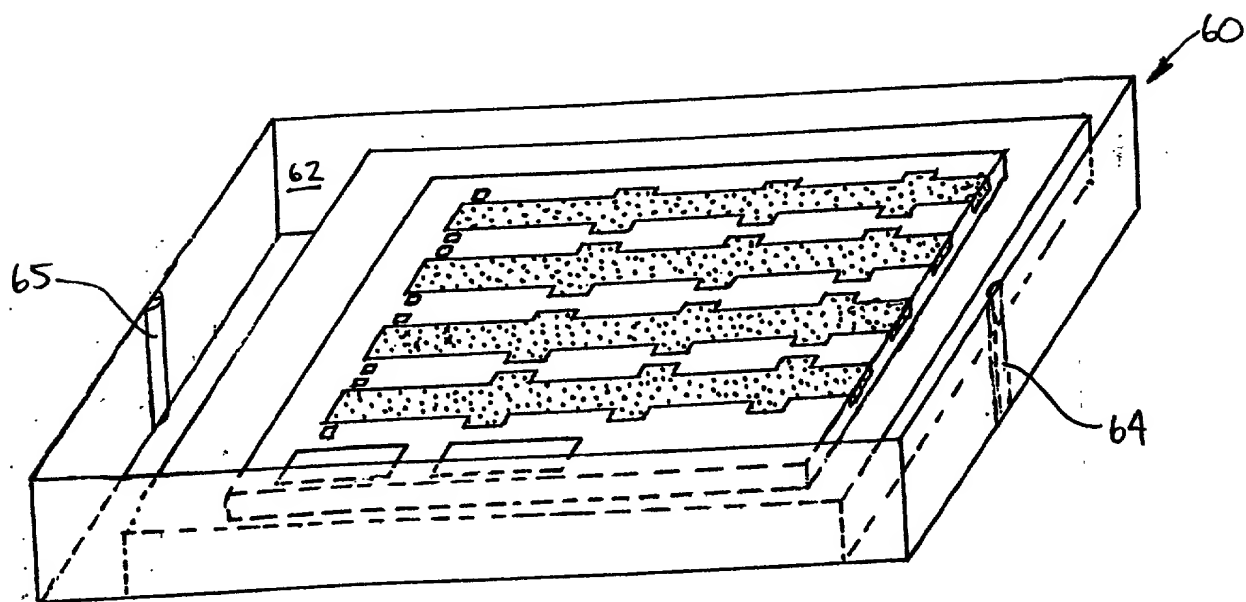
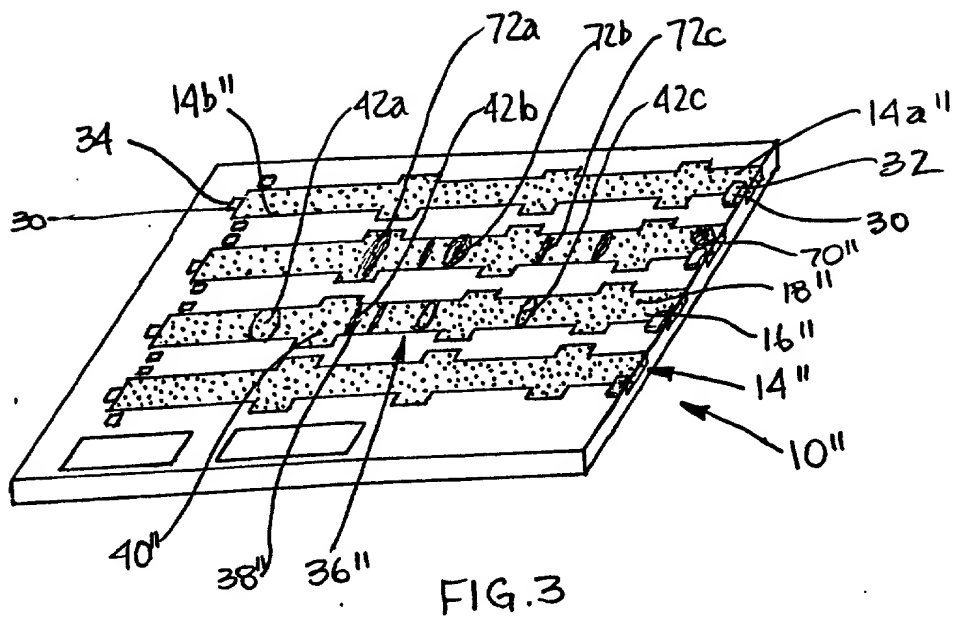


FIG. 2a



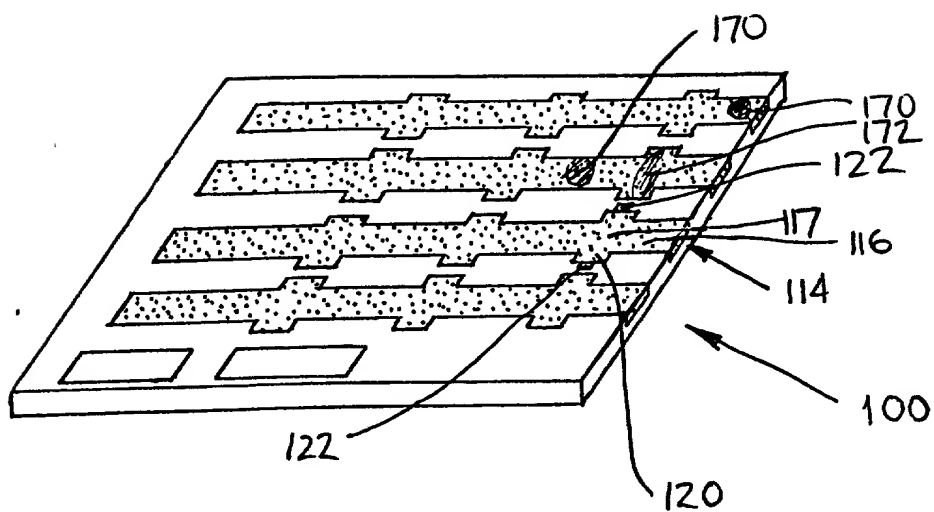


FIG. 4

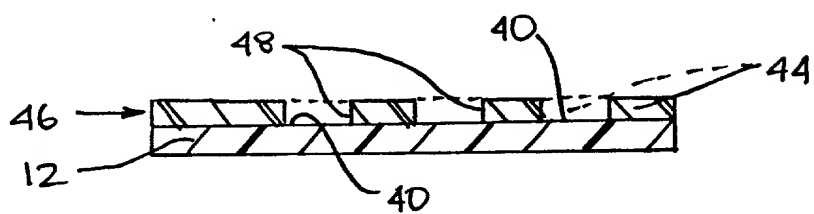


FIG. 5

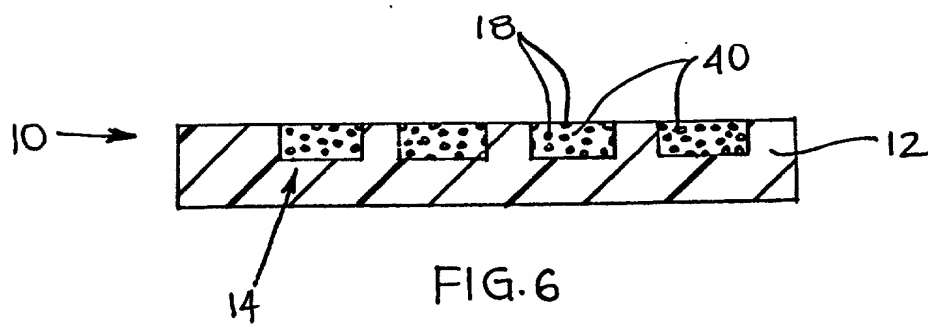


FIG. 6



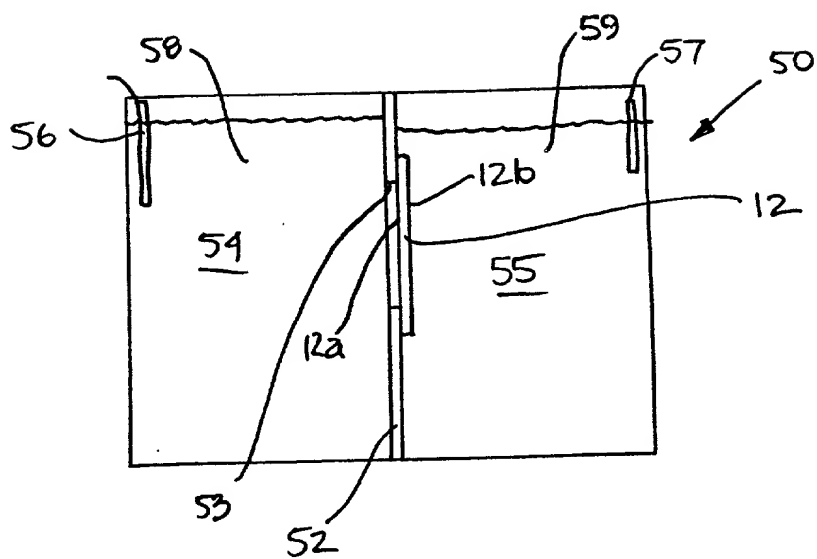


FIG. 7

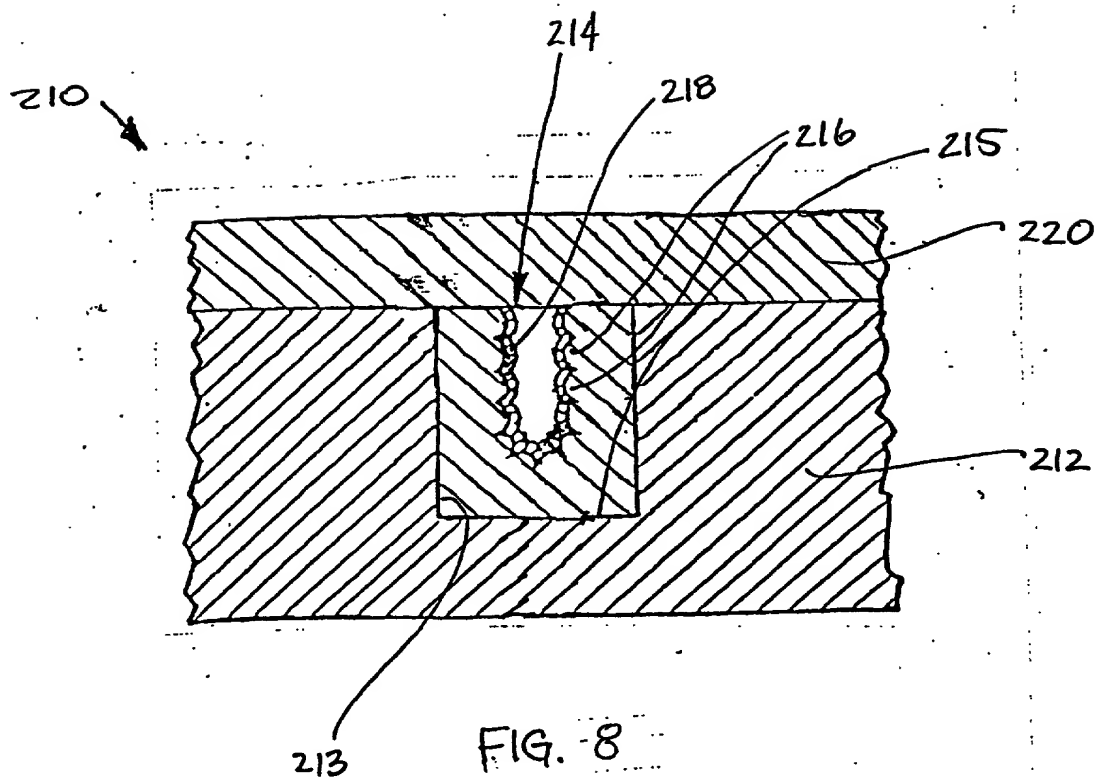


FIG. 8